





Rotary Tiller

MF3



Rotary Tiller MF3

Technical Data

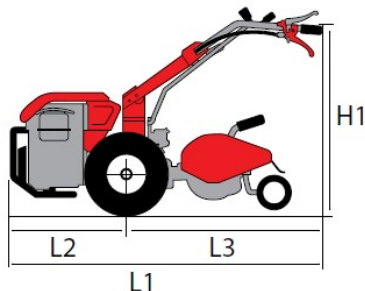

	mm	inches
L1	1440	56.7
L2	470	18.5
L3	970	38.2
H1	230 - 1050	9.1 - 41.3
W1	380	15.0
W2	350 - 600	13.8 - 23.6

Engine	
Honda	GX160
Type	1 cyl. / 4-stroke
Displacement	163 cm ³
Engine output	4.10 kW / 5.5 HP
Revolution speed	3600/rpm
Starter	reversing starter
Air filter	Dry cartridge
Fuel filter	Sieve

Clutch	Hand-Operated dry disc clutch
---------------	-------------------------------

Operational characteristics	
Weight (incl. tiller and tires)	80 kg / 176 lbs.
Working speed: 1 forward and 1 reverse gear	1.18km/h / 0.73mph 1 1R 3.07km/h / 1.91mph
Tires	Pneumatic tires 4.00-8"
Steering bar	Steel tube bar on silent bearings 180° swivel height and side adjustment
Safety:	Dead man`s brake on steering bar

Optional accessories:
- Ridge Plow incl. Adapter
- Tiller 50cm/19.7" (adjustable 35cm/13.8")
- Tiller 60cm/23.6" (Standard) (adjustable 50-35cm/19.7-13.8")
- Snow blade 80cm/31.5"
- Rotary Sweeper 80cm/31.5"
- Bar Mower kpl. 87cm/34.3" or 97cm/38.2" incl. runners
- Bar Mower kpl. 122cm/48" incl. 1 set replacement blades
- Sickle Mower 55cm/21.7"
- Snow Blower 50cm/19.7" discharge throwing distance 10-15m/33'-49'

Authorized dealer:

National Distributor of PowerPac Equipment:



PMI
EQUIPMENT
www.pmiequipment.com